



Lamp Current (A):4.1A
 Ignitor Voltage:3-4KV
 Luminaire Rating: Enclosed
 Burning Position: HOR±45°



ソダテック 1000W Metal Halide Lamps スペックシート

Lamp Type: Metal Halide Lamps (American National Standard)

Control Gear: M141/E or **Electronic Ballast**



Performance Data

Light Output (Lumens @ 100 hours)	80000
Lamp Lumens Per Watt	80
Rated Life (Hrs. @ 10 Hr. /Start)	10000
Correlated Colour Temperature (K)	6000K
Colour Rendering Index (CRI) or (Ra)	65
Typical Hot Restart Time (Minutes)	12-15
Burning Position	HOR±45°



Physical Data / Requirements

Base Designation	E39
Bulb Designation	TT76
Bulb Diameter (mm)	76
Max. Overall Length (mm)	340 ₋₁₀
Light Centre Length (mm)	220±10
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	525
Luminaire Type	Enclosed

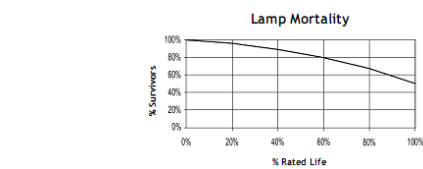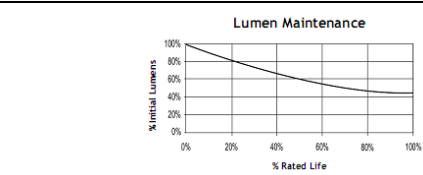

Lamp Electrical Data / Requirements

ANSI Standard	M141/E
Lamp Wattage (W)	1000W
Lamp Operating Voltage (V)	263V
Lamp Operating Current (Amps)	4.1
Min. Open Circuit Voltage (RMS)	-
Min. - Max. Starting Pulse (Peak KV)	3-4
Min. Pulse Width at 2700V (microseconds)	2.5
Min. Pulse Rate Per 1/2 cycle	1
Pulse Position (Electrical Degrees)	64-110'244-290

